

# Time Series Database Interface: TSzip for Interface to zipped csv file

March 15, 2011

## 1 Introduction

The code from the vignette that generates this guide can be loaded into an editor with `edit(vignette("TSzip"))`. This uses the default editor, which can be changed using `options()`. It should be possible to view the pdf version of the guide for this package with `print(vignette("TSzip"))`.

Once R is started, the functions in this package are made available with

```
> library("TSzip")
```

This will also load required packages `TSdbi`, `DBI`, `methods`, `tframePlus`, and `zoo`.

`TSzip` provides methods for the `TSdbi` interface, allowing the use of zipped files that can be read by `read.table` as if each file is a database series (or group of series such as high, low, open, close, for a stock). The `dbname` is a directory or `url`. `TSzip` does not support writing data to the database.

### 1.1 Examples using Itrading data

The following retrieves zipped files from [http://pittrading.com/free\\_market\\_data.htm](http://pittrading.com/free_market_data.htm) which provides some end of day data free of charge. (Disclaimer: This site is used as an example. Other than using this free data, I have no association with the company.)

```
> con <- TSconnect("zip", dbname = "http://pittrading.com/free_eod_data")
```

Once the connection is established, data can be read from it with the same functions as for other `TSdbi` packages.




```
> z <- TSget("INDU", con)
> tfplot(z, graphs.per.page = 3)
> z <- TSget(c("EURUSD", "GBPUSD"), con)
> tfplot(z, graphs.per.page = 3)
> z <- TSget(c("EURUSD", "GBPUSD"), con, select = "Close")
```

```
> tfplot(z, Title = "EURUSD and GBPUSD closing values from pitrading",
        start = "1995-01-01")
> TSrefperiod(z)
```

NULL

```
> TSdescription(z)
```


```
[1] "EURUSD.Close from http://pitrading.com/free_eod_data"
[2] "GBPUSD.Close from http://pitrading.com/free_eod_data"
```

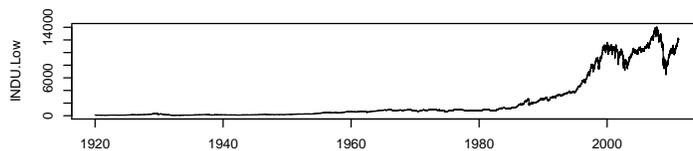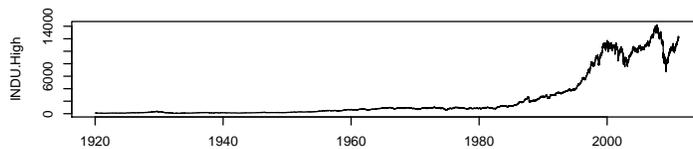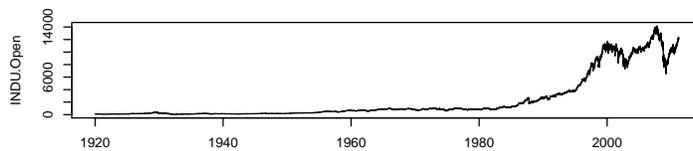

It is also possible to specify a connection to be used as the default, so it is then not necessary to specify the *con* when the default is used:

```
> options(TSconnection = con)
> tfplot(TSget(serIDs = "INDU", select = "High"), TSget(serIDs = "INDU",
        select = "Low"), Title = "INDU High and Low", ylab = "Dow Jones Index",
        start = "1997-01-01")
```

**INDU High and Low**

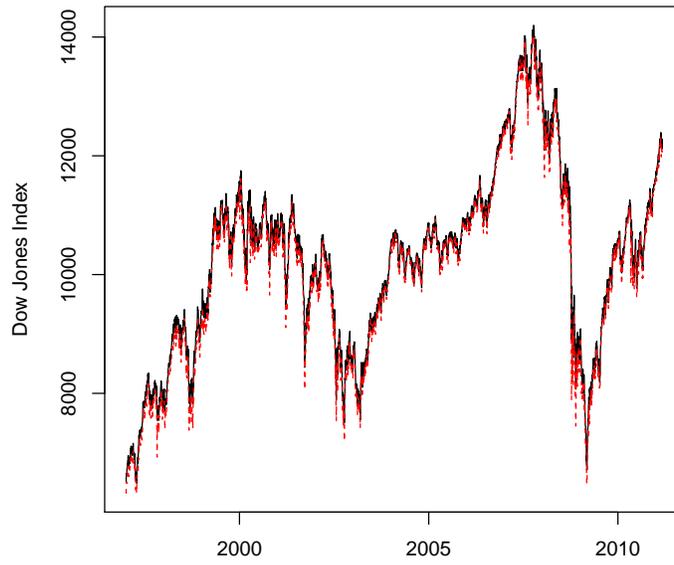

See the *TSdbi* vignette for additional details on using other features of the *TSdbi* interface.